

## ITFZTCHSX-AO

Sophos® ITFZTCHSX Compatible TAA 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC, DOM)

### Features:

- INF-8074 and SFF-8472 Compliance
- VCSEL transmitter and PIN receiver
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Multi-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 1x Fibre Channel
- 1000Base-SX Ethernet
- Access and Enterprise

### Product Description

This Sophos® ITFZTCHSX compatible SFP transceiver provides 1000Base-SX throughput up to 550m over multi-mode fiber (MMF) using a wavelength of 850nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Sophos®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



## Absolute Maximum Ratings

| Parameter                    | Symbol | Min. | Typ.  | Max. | Unit | Notes |
|------------------------------|--------|------|-------|------|------|-------|
| Supply Voltage               | Vcc    | -0.5 |       | 4.0  | V    |       |
| Storage Temperature          | Tstg   | -40  |       | 85   | °C   |       |
| Case Operating Temperature   | Tc     | 0    |       | 70   | °C   |       |
| Operating Humidity           | RH     | 5    |       | 95   | %    |       |
| Data Rate (Gigabit Ethernet) |        |      | 1.25  |      | Gbps |       |
| Data Rate (Fibre Channel)    |        |      | 1.063 |      | Gbps |       |
| 50/125µm MMF                 | L      |      |       | 550  | m    |       |
| Power Consumption            |        |      |       | 0.87 | W    |       |

## Electrical Characteristics

| Parameter                      | Symbol  | Min.    | Typ. | Max.    | Unit | Notes |
|--------------------------------|---------|---------|------|---------|------|-------|
| Power Supply Voltage           | Vcc     | 3.13    | 3.30 | 3.47    | V    |       |
| Power Supply Current           | Icc     |         |      | 250     | mA   |       |
| <b>Transmitter</b>             |         |         |      |         |      |       |
| Input Differential Impedance   | RIN     |         | 100  |         | Ω    | 1     |
| Single-Ended Data Input Swing  | VIN,pp  | 250     |      | 1200    | mV   |       |
| Tx_Disable - High              |         | Vcc-1.3 |      | Vcc     | V    |       |
| Tx_Disable - Low               |         | Vee     |      | Vee+0.8 | V    |       |
| Tx_Fault - High                |         | Vcc-0.5 |      | Vcc     | V    |       |
| Tx_Fault - Low                 |         | Vee     |      | Vee+0.5 | V    |       |
| <b>Receiver</b>                |         |         |      |         |      |       |
| Single-Ended Data Output Swing | VOUT,pp | 300     | 400  | 800     | mV   | 2     |
| Data Output Rise Time          | Tr      |         |      | 175     | ps   | 3     |
| Data Output Fall Time          | Tf      |         |      | 175     | ps   | 3     |
| LOS - High                     |         | Vcc-0.5 |      | Vcc     | V    |       |
| LOS - Low                      |         | Vee     |      | Vee+0.5 | V    |       |

### Notes:

1. AC coupled.
2. Into 100Ω differential termination.
3. 20-80%.

## Optical Characteristics

| Parameter                | Symbol            | Min. | Typ. | Max. | Unit | Notes |
|--------------------------|-------------------|------|------|------|------|-------|
| Transmitter              |                   |      |      |      |      |       |
| Average Output Power     | PO                | -9   |      | -4   | dBm  | 1     |
| Optical Wavelength       | $\lambda$         | 830  | 850  | 860  | nm   |       |
| Spectral Width           | $\sigma$          |      |      | 0.85 | nm   |       |
| Optical Rise/Fall Time   | Tr/Tf             |      |      | 260  | ps   | 2     |
| Total Jitter             | TJ                |      |      | 200  | ps   |       |
| Optical Extinction Ratio | ER                | 9    |      |      | dB   |       |
| Receiver                 |                   |      |      |      |      |       |
| Receiver Sensitivity     | RSNS              |      |      | -18  | dBm  | 3, 4  |
| Maximum Received Power   | RX <sub>MAX</sub> | 0    |      |      | dBm  |       |
| Center Wavelength        | $\lambda_C$       | 770  |      | 860  | nm   |       |
| LOS De-Assert            | LOSD              |      |      | -26  | dBm  |       |
| LOS Assert               | LOSA              | -40  |      |      | dBm  |       |
| LOS Hysteresis           |                   | 0.5  |      | 5    | dB   |       |

### Notes:


1. Class 1 laser safety.
2. Unfiltered, 20-80%. Complies with GE and 1xFC eye masks when filtered.
3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
4. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-10</sup> BER.

## Pin Descriptions

| Pin | Symbol      | Name/Description                                                 | Notes |
|-----|-------------|------------------------------------------------------------------|-------|
| 1   | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 2   | Tx_Fault    | Transmitter Fault.                                               |       |
| 3   | Tx_Disable  | Transmitter Disable. Laser output disabled on “high” or “open.”  | 2     |
| 4   | MOD_DEF(2)  | Module Definition 2. Data Line for Serial ID.                    | 3     |
| 5   | MOD_DEF(1)  | Module Definition 1. Clock Line for Serial ID.                   | 3     |
| 6   | MOD_DEF(0)  | Module Definition 0. Grounded within the module.                 | 3     |
| 7   | Rate Select | No Connection Required.                                          |       |
| 8   | LOS         | Loss of Signal Indication. “Logic 0” indicates normal operation. | 4     |
| 9   | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 10  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 11  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 12  | RD-         | Receiver Inverted Data Out. AC Coupled.                          |       |
| 13  | RD+         | Receiver Non-Inverted Data Out. AC Coupled.                      |       |
| 14  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 15  | VccR        | Receiver Power Supply.                                           |       |
| 16  | VccT        | Transmitter Power Supply.                                        |       |
| 17  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 18  | TD+         | Transmitter Non-Inverted Data In. AC Coupled.                    |       |
| 19  | TD-         | Transmitter Inverted Data In. AC Coupled.                        |       |
| 20  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |


## Notes:

1. The circuit ground is internally isolated from the chassis ground.
2. Laser output is disabled on Tx\_Disable>2.0V or open, enabled on Tx\_Disable<0.8V.
3. Should be pulled up with 4.7kΩ to 10kΩ on the host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls the line low to indicate that the module is plugged in.
4. LOS is an open collector output. Should be pulled up with 4.7kΩ to 10kΩ on the host board to a voltage between 2.0V and 3.6V. “Logic 0” indicates normal operation. “Logic 1” indicates a loss of signal.

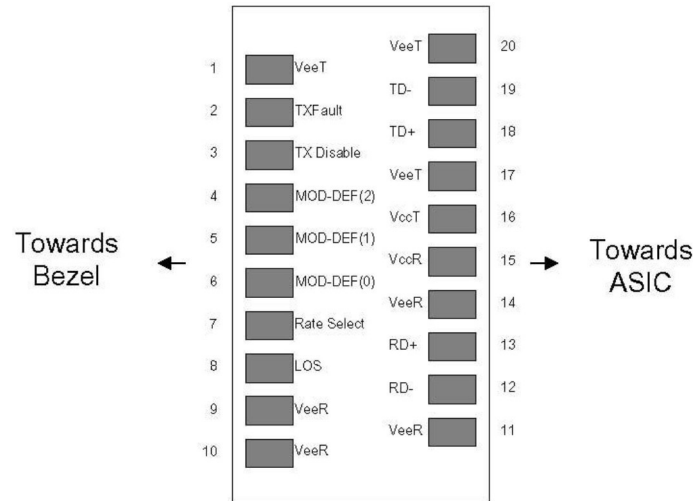


Pin-Out of Connector Block on the Host Board

### Recommended Circuit Schematic

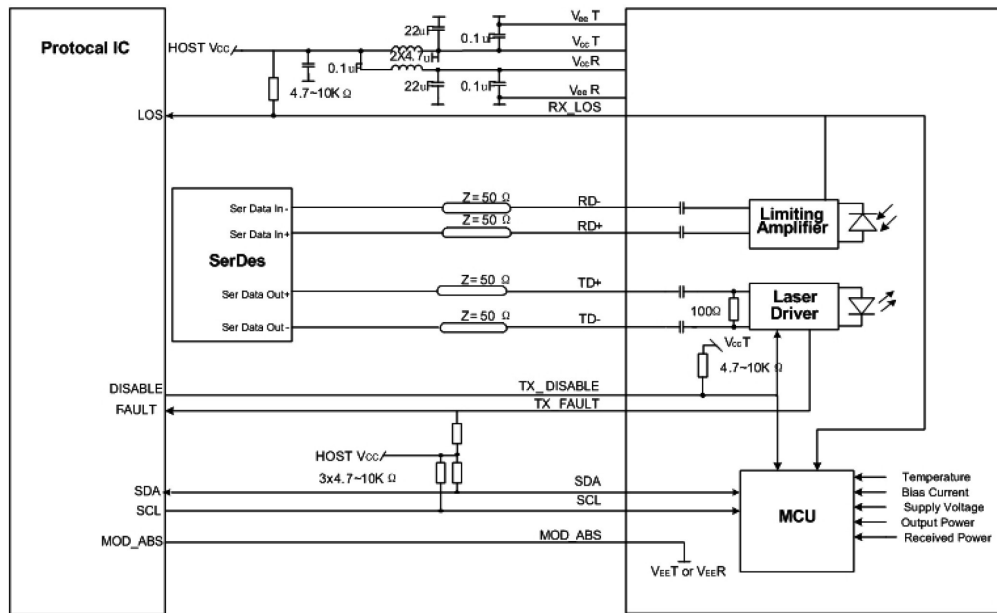


**Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

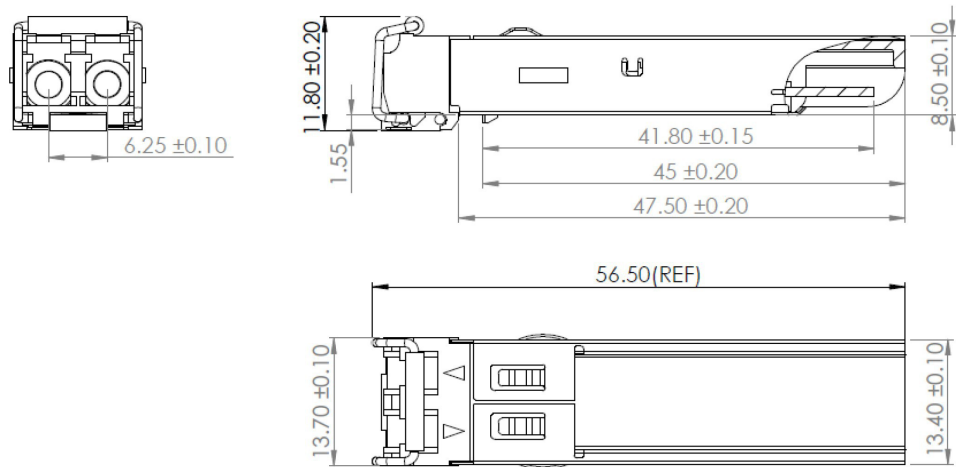

**EEPROM Information**

EEPROM memory map-specific data field description is as below:

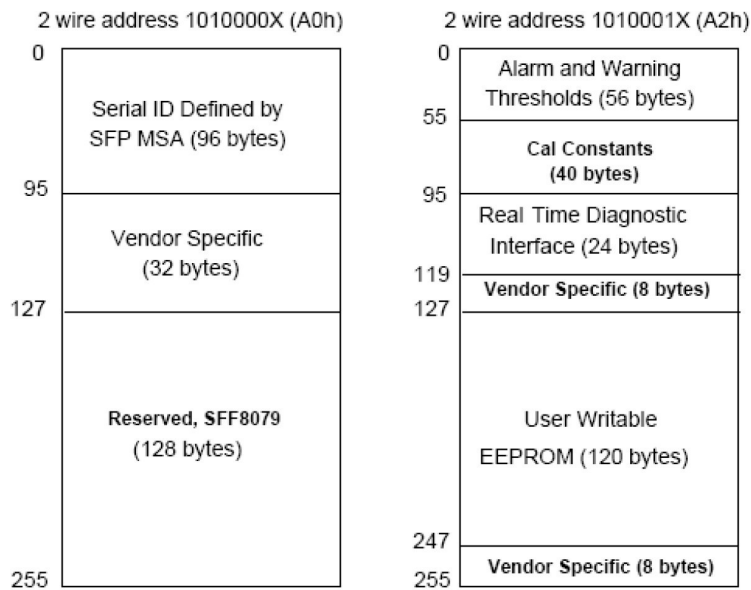

## About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications ranging from NEBS Level 3 to ISO 9001:2015 with every new development while maintaining the signature reliability of its products.



## U.S. Headquarters

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## Europe Headquarters

Email: [salesemea@addonnetworks.com](mailto:salesemea@addonnetworks.com)

Telephone: +44 1285 842070